

# PRODUCT DATA SHEET

## FP Polytite Butyl Sealant

### Description:

High performance extruded butyl sealant tape with a fixed polyester liner.

### Application(s):


Sealing side laps of roof and wall liner panels and steel decking.  
To prevent cold bridging on purlins and side rails

### Features:

12-Year Warranty (UK & Ireland only)  
'High tack', proving excellent adhesion  
Designed specifically to accommodate movement  
Service life can exceed 20 years  
Very low vapour transmission rate

### Approvals:

MCRMA Technical Paper No. 14 - Guidance for the Design of Metal Roofing and Cladding to Comply with Approved Document L2:2006.

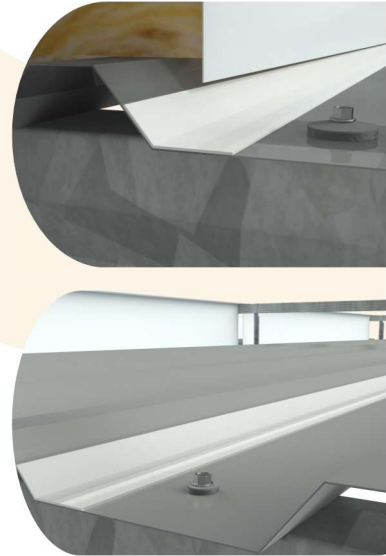

Code	Size	Length
POLYTITE50	50mm x 1mm	35m
POLYTITE100	100mm X 1m	35m

### Properties:

Application temperature range: +5°C to +40°C  
Service Temperature Range: -40°C to +90°C  
Shelf Life: 24 months when stores flat, in original packaging in cool, dry conditions.

### Instructions:

Surface Preparation: All surfaces should clean, dry and free from frost, grease and loose materials.

Application: Apply direct from the reel onto one surface and press sufficiently along it's whole length to achieve good initial adhesion.